



# EXTERIOR WOOD STAIN & NATURAL PROTECTION GUIDE

Protect & Enhance The Natural Beauty  
Of Wooden Houses , Decks, Gazebos, Fences & Siding



CLEAN



COAT



PROTECT


Arsh Build Tech is leading company of exterior and interior wood protective coatings. We have complete solutions for wood protection, preservation, finishing and maintenance for exterior and interior both. Our all products are low VOC, water based with fast drying property. The touch dry will be in only 20 minutes and recoating after two hours. All coatings keep and preserve the natural look of wood grains and protects with extreme weather, UV protection and advance moisture protection. The materials are penetration agent that impregnates inside the porous part of wood so it does not peel-off. The protective coatings are highly water repellent, low odour, allow the timber to “Breathe”, and harmless to pet and plants. It contains fungicides to give long lasting protection from rot and mould. The special pigments also resist UV light and fading.

We are the authorized sales channel partner of “Rustins Limited” a 98 years old UK based company. We also represent the “Wolman Rust-Oleum brand” in India. Our product is loved by professionals and DIY home make owners.

**Ideal Uses:** - Wooden Homes & Cottages, Wooden Gazebos, outdoor furniture & decor, Garden Furniture, Wooden cladding, wooden floor and Decks, fences, play sets siding and more.



## QUICK DRY TIMBERLIFE



Protect and add the life of outdoor timber and garden timber. Highly water repellent and resist to fading. It is also harmless to pet and plants. It is made in range of attractive colours and contains a high quality of acrylic binders, preservatives and waxes to give all exterior timber long lasting protection from rot and mould. The special pigments are resistant to ultra violet light and fading.

### Product Features:

- \*Water-based single product system and maximum two coats required.
- \*Very fast drying product, touch dry in 20minutes and re coating after 2Hours.
- \*Keep and preserve the natural look of wood grains with clear and colour ranges.
- \*Penetration agent with low VOC and doesn't peel-off.
- \*Protect from all extreme weather, UV protection with advance moisture protection.
- \*Highly water repellent, low odour and harmless to pet and plants.
- \*It contains fungicides to give long lasting protection from rot and mould.
- \*Special pigment which resists UV light and fading.
- \*UP to 5years protection.



## Product Application Guide

Timber life is wood protection ready made polish penetrates deeply inside the porous part of wood.

### Step 1

- \*If the surface is already painted or polished, remove with the help of paint remover or sand paper till the actual wood comes in a condition to absorb the readymade polish.
- \*If required, first sand the surface with 80 no., and thereafter with 120 no., 400 no. waterproof and lastly with 600 no. water proof sandpaper till the surface is smooth enough.
- \*All sanding to be done in the direction of the grains of the wood.


### Step2

- \*First Coat: Apply the material directly on surface in recommended dilution with potable water by soft brush (painter brush/Kalam Brush) or spray in the direction of wood grains.
- \*Let it dry for at least 2 hours.
- \*After 2 hours do the very soft sanding with more than 600 no. waterproof sandpaper to remove the superficial particles. All sanding should be done in the direction of the grains.


### Step3

- \*Second Coat: Apply second coat of material without any dilution with a soft brush (Painter/ Kalam Brush) or gun in the direction of grains of wood.

- Note: - The consumption may vary due to porosity of substrate, so for huge surface a trial is required.
- The all application will be done towards the direction of wood gain.

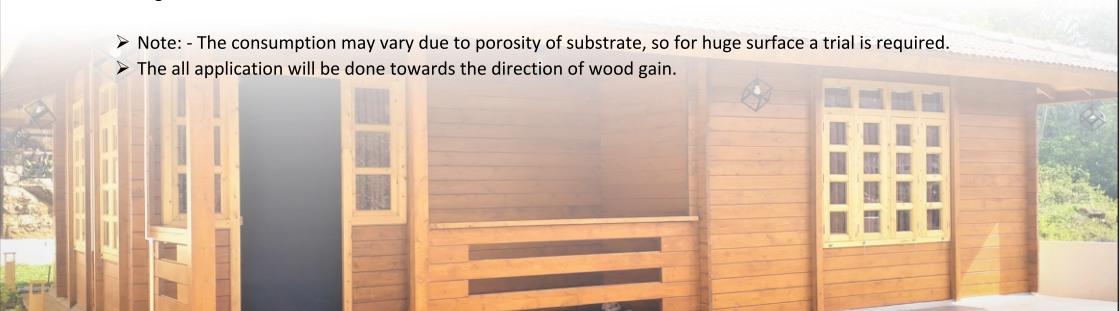

## QUICK DRY DECKING OIL

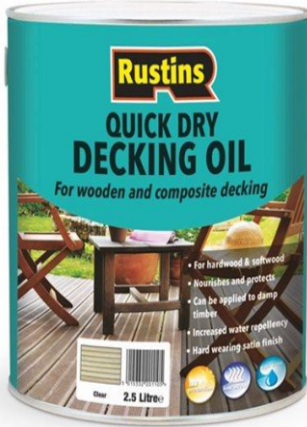

A water-based, low odour, hard-wearing, water resistant oil that enhances the colour of the decking. For use on bare or previously finished composite or wooden decking. It contains UV light inhibitors that protect the decking oil from sunlight and can be applied whilst the decking is still damp. Use on composite, hard or soft wood decking, It will leave a hard-wearing stain finish

### Product Feature :-

- \* A blend of water-resistant oils and polymers with added UV absorbers and biocide to protect the oil from mould.
- \* Can be used on Hard, soft wood and wooden composite decking.
- \* Water-based, low odour, low toxicity and Hard-wearing.
- \* Can be applied on damp timber.
- \* Fast drying, touch dry in 30 minutes and recoating within 3 hours.
- \* In 1Ltr the coverage is 150 Sqft.
- \* Give UV protection and increase the water repellency.
- \* Pack Sz 2.5 Ltr & 5ltr



### Colour Chart



Natural Cedar



Natural Oak



Clear

### Product Application Guide

Decking oil is wood protection ready made polish penetrates deeply inside the porous part of wood.

#### Step 1

If the surface is already painted or polished, remove with the help of paint remover or sand paper till the actual wood comes in a condition to absorb the ready made polish.

If required, first sand the surface with 80 no., and thereafter with 120 no., 400 no. waterproof and lastly with 600 no. water proof sandpaper till the surface is smooth enough.

\*All sanding to be done in the direction of the grains of the wood.

#### Step2

First Coat: Apply the material directly on surface by soft brush(Kalam/ Painter brush) in the direction of wood grains

\*Let it dry for at least 3 hours.

\*After 3 hours do the very soft sanding with more than 600 no. waterproof sandpaper to remove the superficial particles.

\*All sanding should be done in the direction of the grains.

#### Step3

Second Coat: Apply second coat of material without any dilution with a soft brush (Painter/ Kalam Brush)or spray gun in the direction of grains of wood.

Note: - The consumption may vary due to porosity of substrate, so for huge surface a trial is required. The all application will be done towards the direction of wood grain. For deck the light foot traffic after 24 hours and full load after 72

Hours.



## Quick Dry Decking Stain & Seal

A quick dry waterborne stain which dries to a tough, water resistant, matt finish. Coloured waterbased acrylic stains, gives long lasting protection to all external wood, while allowing the natural grain to show through. Low odour, non-yellowing, resist cracking, peeling, blistering. Wash brush in water.

### Product Feature:-

- \* A quick dry waterborne stain
- \* Two coats applications
- \* High solid content gives better protection
- \* Gives UV protection
- \* Contains biocide to protect from algae/mould.
- \* Available pack size 2.5Ltr




### Color Chart



**Antique Pine**



**Brown Cedar**



**English Oak**

## Product Application Guide

Decking oil is wood protection ready made polish penetrates deeply inside the porous part of wood.

### **Step 1**

\* If the surface is already painted or polished, remove with the help of paint remover or sand paper till the actual wood comes in a condition to absorb the readymade polish.

\* If required, first sand the surface with 80 no., and thereafter with 120 no., 400 no. waterproof and lastly with 600 no. water proof sandpaper till the surface is smooth enough.

\* All sanding to be done in the direction of the grains of the wood.

### **Step2**

\* First Coat: Apply the material directly on surface by soft brush (Kalam/ Painter brush) in the direction of wood grains

\* Let it dry for at least 3 hours.


\* After 3 hours do the very soft sanding with more than 600 no. waterproof sandpaper to remove the superficial particles.

All sanding should be done in the direction of the grains.

### **Step3**

\* Second Coat: Apply second coat of material without any dilution with a soft brush (Painter/ Kalam Brush) or spray gun in the direction of grains of wood.

- Note: - The consumption may vary due to porosity of substrate, so for huge surface a trial is required.
- The all application will be done towards the direction of wood gain.
- For deck the light foot traffic after 24 hours and full load after 72 Hours.

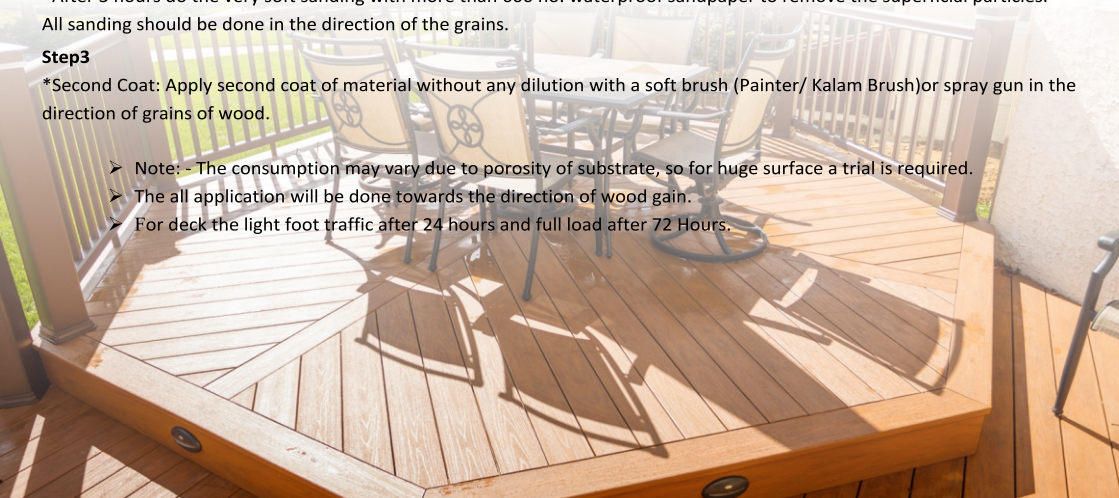



## Decking Cleaner

A ultimate product for cleaning and reviving weathered garden decking. It is ideal for removing dirt, grease and stains prior to treatment with Rustins Decking stain and Seals or Decking Oil. Ready to use no needs to dilute.

### Product Feature:-

- \*For new and weathered cleaning
- \* ready to use so no dilution
- \*For new and weathered decking
- \* High quality detergents remove stains, revive the colour and give better claeing.
- \* Has other exterior uses- fences and outdoor woods and others.
- \* Available pack size 4Ltr



**Rustins**

**BT**  
Protection & Preservation





**Rustins Limited**  
**Waterloo Road, London**  
**NW2 7TX, United Kingdom**

**Sales Office:- B-24, DDA Sheds, Okhala Phase-2**  
**New Delhi-110040 India**  
**Registered Address : Unit No.-2, Gali No.4,**  
**Chauhan Colony, Faridabad-121003, Haryana**

## **Arsh Build Tech**

---

[sales@arshbuildtech.com](mailto:sales@arshbuildtech.com) | [arshbuildtech1@gmail.com](mailto:arshbuildtech1@gmail.com)  
PH. +91-9958502276 | [www.arshbuildtech.com](http://www.arshbuildtech.com)